


35mm² Battery Cable with High-Current Fuse Holder

Electrical characteristics

Product Code	60227 IEC 02(RV) 35mm ²
SKU	4003501/4003502
EAN Code	4260558575313/4260558575320
Construction Item	35mm ²
Conductor Construction (mm)	276/0.39 ± 0.008
Conductor Material	copper
Conductor stranded outer diameter (mm)	8.02
Insulation Material	PVC
Insulation Avg.Thick (mm)	1.20
Insulation Min.Thick (mm)	0.98
Insulation stranded outer diameter (mm)	10.4 ± 0.5
Voltage rating (V)	450/750
Test voltage of finished cable (V)	2500
Conductor resistance (ΩKM Max at 20°C)	0.554
Insulation resistance (MΩ/KM Min in 70°C)	0.0038

Physical Properties

Elongation of unaged values	≥125%
Tensile strength of unaged values	≥10 N/mm ²
Bending radius	≥8D
Temperature rating	70°C
Dimension (m)	1m/2m

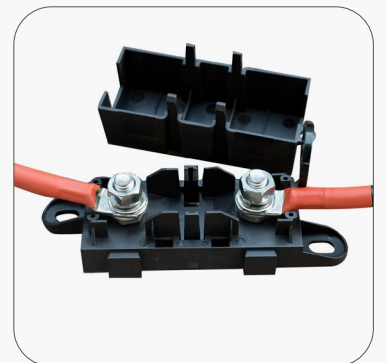

SolarV GmbH

Am Kronberger Hang 2,65824 Schwalbach a.T



+49 (0)61969076877

info@solarv.de

www.solarv.de